

Hyperspan Core™ Cat5e U/UTP LSZH B2ca-s1,d1,a1 305 m Box Orange

Engineered for long-distance, high-power performance, we can deliver:
Product Code: HSP-CAT5E-INT-UUTP-B2CA-ORANGE-305

Cat5e

- Cat5e 24AWG Solid Copper
- U/UTP No Overall Screening
- No Conductor Screening
- Outer Sheath Colour Orange
- Reaction-to-fire class EN 13501-6 B2ca-s1,d1,a1
- Smoke development class EN13501-6 S1
- Fixed Building Installation


Product Overview

Hyperspan Core™ Cat5e solid copper bulk cable. Cable type U/UTP, 24 AWG Class 1 solid conductor, LSZH outer sheath (Orange). Declared reaction-to-fire B2ca-s1,d1,a1 under EN 13501-6 / EN 50575. Supplied as 305 m Box. Confirm certified documentation with Hyperspan Technical Support.

Each cable consists of 8 colour-coded solid oxygen-free copper conductors, arranged into four balanced twisted pairs. Construction: U/UTP. Overall screening: None. Conductor screening: None.

The cable is finished with a LSZH outer sheath (Orange) and is intended for Commercial Buildings where the declared reaction-to-fire performance B2ca-s1,d1,a1 is required.

Cross-section diagram
U/UTP — unshielded twisted pairs

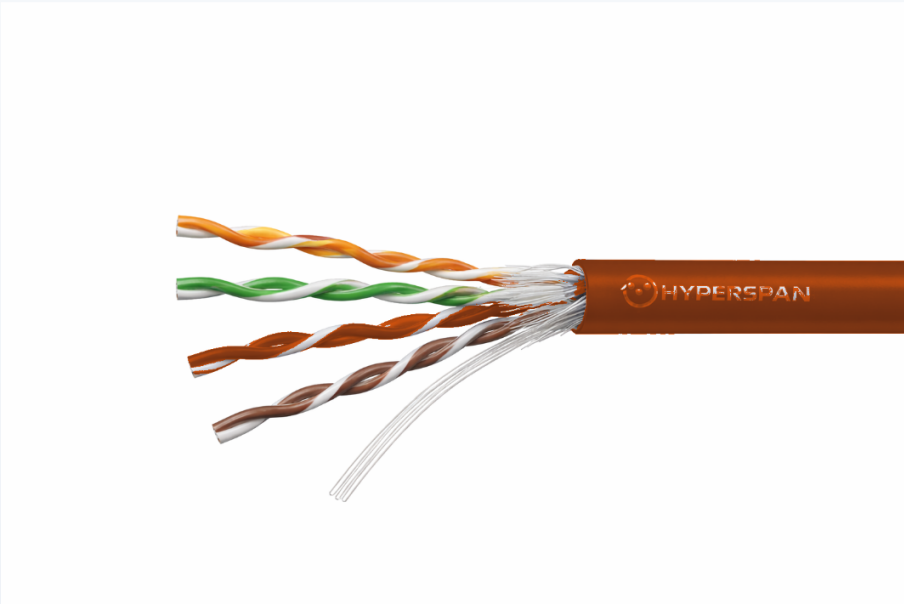

HYPERSPAN
CAT5e · ORANGE
0ca LSZH · Solid copper · Optional colourway



Hyperspan Core™ Cat5e U/UTP LSZH B2ca-s1,d1,a1 305 m Box Orange



Engineered for long-distance, high-power performance, we can deliver:

Product Code: HSP-CAT5E-INT-UUTP-B2CA-ORANGE-305

Cat5e

PRODUCT SPECIFICATION

Characteristic	Value
Conductor Surface	Bare copper
Conductor Material	99.99% Oxygen-Free Copper
AWG Size	24 AWG
Conductor Category	Class 1 – Solid
Total Number of Cores	8
Stranding Element	Twisted pairs
Core Insulation	High-density polyethylene (HDPE)
Cable Construction	U/UTP
Overall Screening	None
Conductor Screening	None
Outer Sheath Material	LSZH
Outer Sheath Colour	Orange
Packaging	305 m Box
Flame Retardant (IEC 60332-1-2)	yes
Reaction-to-Fire (EN 13501-6)	B2ca-s1,d1,a1
Smoke Development (EN 13501-6)	s1
Flaming Droplets (EN 13501-6)	d1
Acidity (EN 13501-6)	a1
Outer Diameter (approx.)	ca. 6.1–7.5 mm (construction dependent)
Installation Temperature Range	-10°C to +60°C
Operating Temperature Range	-20°C to +75°C
NVP	69 %
Application	Commercial Buildings
Warranty	25-Year System Warranty

Hyperspan Core™ Cat5e U/UTP LSZH B2ca-s1,d1,a1 305 m Box Orange



HYPERSPAN

Engineered for long-distance, high-power performance, we can deliver:

Product Code: HSP-CAT5E-INT-UUTP-B2CA-ORANGE-305

Cat5e

Standards

Applicable Standards	Subject
ISO/IEC 11801	Information technology — Generic cabling for customer premises
EN 50173-1	Information technology — Generic cabling systems
ANSI/TIA-568.2-D	Balanced twisted-pair telecommunications cabling
EN 50575:2014+A1:2016	Power, control and communication cables — reaction to fire
EN 13501-6	Fire classification of construction products — cables
EN 50399	Common test methods for cables under fire conditions
EN 60332-1-2	Tests on electric and optical fibre cables under fire conditions
EN 61034-2	Measurement of smoke density of cables burning under defined conditions
EN 60754-2	Test on gases evolved during combustion of materials from cables

Environmental & Compliance Certifications	
RoHS-II / RoHS-III	Compliant — hazardous substance restrictions
WFD / SCIP	Support for substance information where applicable
POPs (EU)	Persistent organic pollutants requirements observed
CE / UKCA	Conformity marking as applicable to intended market
Declared CPR class	B2ca-s1,d1,a1
DoP reference	HSP-DOP-CAT5E-INT-UUTP-B2CA-ORANGE-305

Power, control and communication cables — cables for general applications in construction works subject to reaction-to-fire requirements. Confirm the certified Declaration of Performance revision with Hyperspan Technical Support before procurement or installation.