

Hyperband Blown Fibre OS2 2f Cca-s1a,d1,a1

HSP-FIB-BLW-OS2-2F-CCA

Hyperband cable. Jacket colour matches this grade.

THIS ITEM

Hyperband cable. Jacket colour matches this grade.

KEY FEATURES

- OS2
- Blown fibre
- 2f
- LSZH

Jacket


LSZH

CPR / fire rating

Cca-s1a,d1,a1

Colour

Yellow

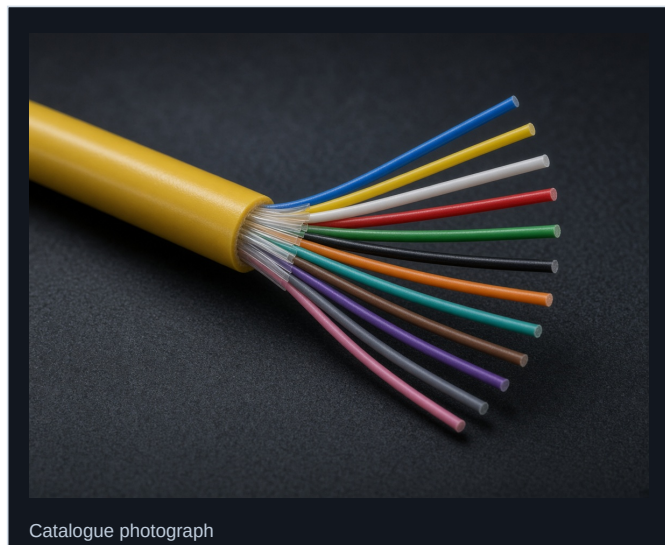

Catalogue photograph

SPECIFIED WITH

Microduct pathway

Fibre panels

Pigtails of this grade

Characteristic	Value for this SKU
Product code	HSP-FIB-BLW-OS2-2F-CCA
Product name	Hyperband Blown Fibre OS2 2f Cca-s1a,d1,a1
Jacket	LSZH
CPR / fire rating	Cca-s1a,d1,a1
Colour	Yellow
Packaging	2000 m reel
Application	Microduct blown install
Format	2f
Category	OS2
Warranty	25-Year System Warranty
Photograph	Prepared cable end, showing the jacket colour for this grade
DoP reference	HSP-DOP-FIB-BLW-OS2-2F-CCA
Optical references	IEC 60793, IEC 60794, ISO/IEC 11801
Family	FIBRE

NOTES

Hyperband Blown Fibre OS2 2f Cca-s1a,d1,a1. Where the photograph is a prepared end, the jacket colour is the colour code for this grade.
 Declared reaction to fire Cca-s1a,d1,a1. Declaration of Performance HSP-DOP-FIB-BLW-OS2-2F-CCA.
 25-Year System Warranty