


OM4 Tight Buffered 24-Fibre LSZH Cca-s1a,d1,a1

HSP-FIB-CBL-OM4-TB-24-CCA-500

Hyperband cable. Jacket colour matches this grade.

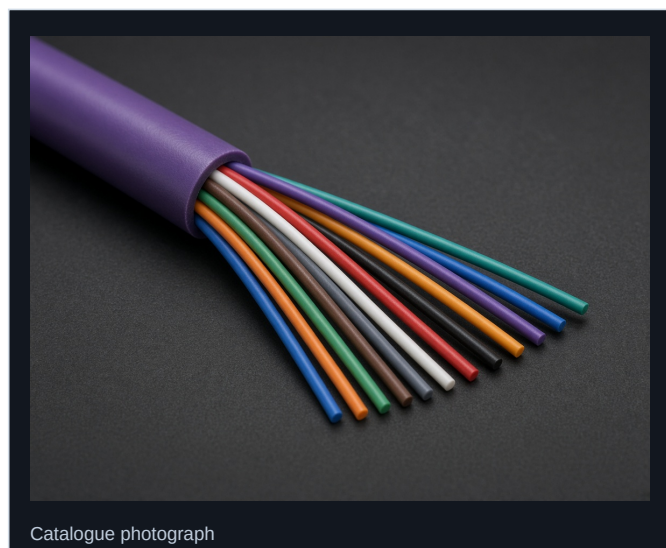

Catalogue photograph

THIS ITEM

Hyperband cable. Jacket colour matches this grade.

KEY FEATURES

- OM4
- Tight buffered
- 24f
- LSZH

Jacket

LSZH

CPR / fire rating

Cca-s1a,d1,a1

Colour

Erika Violet

SPECIFIED WITH

Pigtails of this grade

Fibre panels

LC or SC connectors

Characteristic	Value for this SKU
Product code	HSP-FIB-CBL-OM4-TB-24-CCA-500
Product name	OM4 Tight Buffered 24-Fibre LSZH Cca-s1a,d1,a1
Jacket	LSZH
CPR / fire rating	Cca-s1a,d1,a1
Colour	Erika Violet
Packaging	500 m drum
Application	Internal 10/40G backbone
Format	24f
Category	OM4
Warranty	25-Year System Warranty
Photograph	Prepared cable end, showing the jacket colour for this grade
DoP reference	HSP-DOP-FIB-CBL-OM4-TB-24-CCA-500
Optical references	IEC 60793, IEC 60794, ISO/IEC 11801
Family	FIBRE

NOTES

OM4 Tight Buffered 24-Fibre LSZH Cca-s1a,d1,a1. Where the photograph is a prepared end, the jacket colour is the colour code for this grade. Declared reaction to fire Cca-s1a,d1,a1. Declaration of Performance HSP-DOP-FIB-CBL-OM4-TB-24-CCA-500. 25-Year System Warranty