


Power Control vertical PDU, 20 x IEC C13 and 4 x IEC C19 locking outlets, per-outlet metering and switching, top feed, IEC 60309 32 A red commando, 3 m cord 20 x C13 +

HSP-PDU-CTRL-V-20C13-4C19-32A-TF

Power Control. Per-outlet switching on a 3 m cord.

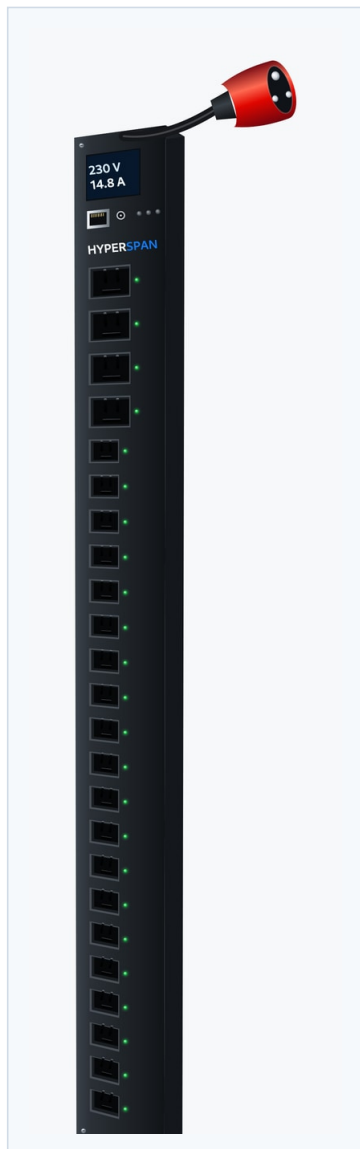

POWER CONTROL

HSP-PDU-CTRL-V-20C13-4C19-32A-TF is a Power Control intelligent vertical PDU. Each outlet is metered and can be switched. The controller sits at the feed end named on this code. The cord is 3 m.

KEY FEATURES

- Per-outlet metering
- Per-outlet switching
- Outlet state lamps
- Top feed. The cord leaves the upper end.
- 3 m commando cord

Input	
Characteristic	Value for this SKU
Series	Hyperspan Power Control
Supply	220-240 V AC, single-phase, 50 Hz
Rated current	32 A
Inlet plug	IEC 60309 32 A, 2P+E, red
Input cord	3 m flexible cord, factory fitted
Feed	Top feed. The cord leaves the upper end.
Overcurrent	Resettable input breaker matched to the inlet. Upstream protection stays on the distribution board.

Power Control vertical PDU, 20 x IEC C13 and 4 x IEC C19 locking outlets, per-outlet metering and switching, top feed, IEC 60309 32 A red commando, 3 m cord 20 x C13 +

HSP-PDU-CTRL-V-20C13-4C19-32A-TF

Power Control. Per-outlet switching on a 3 m cord.

Outlets

Characteristic	Value for this SKU
Outlet map	20 x IEC 60320 C13, 4 x IEC 60320 C19
C13	20
C19	4
UK 13 A	None on this code
Retention	IEC outlets fitted with retention clips
Outlet switching	Each outlet can be switched from the network

Monitoring

Characteristic	Value for this SKU
Local display	Inlet totals and per-outlet state
What is metered	Inlet, and current on each outlet
Sensors	One port for an optional temperature probe, ordered separately

Network

Characteristic	Value for this SKU
Ethernet	10/100, on the controller module
Browser	Status, outlet control and alert thresholds
SNMP	v2c and v3 read, and outlet control
Alerts	Email when an inlet or outlet crosses the set threshold

Mechanical

Characteristic	Value for this SKU
Mounting	Vertical 0U in the cabinet side channel
Finish	Black chassis, HYPERSPAN wordmark
Length	Nominal chassis length follows the outlet count. Confirm the mounting drawing before the cabinet is ordered.
Fits	Hyperspan Rack side channel or 19-inch rails, as named for this code

Environment

Characteristic	Value for this SKU
Operating	0 C to 45 C
Humidity	5% to 95% RH, non-condensing
Location	Indoor rack and comms room

Power Control vertical PDU, 20 x IEC C13 and 4 x IEC C19 locking outlets, per-outlet metering and switching, top feed, IEC 60309 32 A red commando, 3 m cord 20 x C13 +

HSP-PDU-CTRL-V-20C13-4C19-32A-TF

Power Control. Per-outlet switching on a 3 m cord.

Standards this design follows

Characteristic	Value for this SKU
Outlets	IEC 60320 for C13 and C19
Inlet	IEC 60309 industrial plug
Safety intent	Specified against BS EN 62368-1 for ICT equipment
EMC intent	Specified against BS EN 55032

NOTES

HSP-PDU-CTRL-V-20C13-4C19-32A-TF is a Power Control intelligent vertical PDU. Each outlet is metered and can be switched. The controller sits at the feed end named on this code. The cord is 3 m.

Confirm the inlet, residual-current protection and distribution-board capacity with the project electrical designer before installation.

A management network drop is required for remote reading. Order the temperature probe separately if the sensor port is used.

Product warranty; 25-Year System Warranty applies to qualifying registered Hyperspan channels