


Acoustic Cabinet 42U

HSP-RACK-AC-42U

Rack cabinet. Size, door and load as specified for this code.

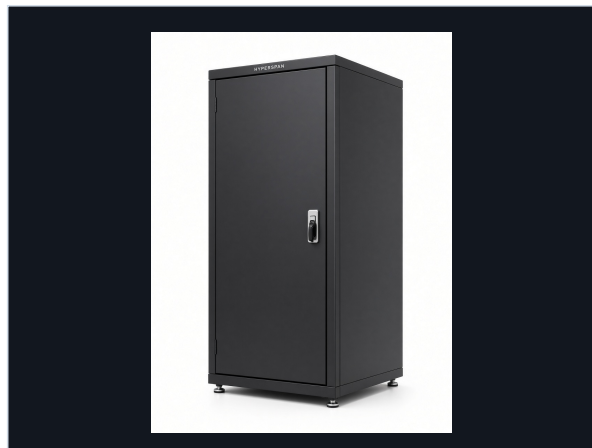

PRODUCT OVERVIEW

HSP-RACK-AC-42U is a 42U Hyperspan Rack acoustic cabinet. The footprint is 800 x 1000 mm. The enclosure is solid, for occupied spaces where plant noise has to be contained. 19-inch EIA-310 rails, numbered in U, are fitted front and rear. The doors lock, the side panels come off, and the roof is a closed panel. It is supplied flat-packed for assembly on site. Baying is supported, and the baying kit is ordered as an accessory. Typical use: Occupied-space server noise control. Specify it with Power PDUs, Rack panels and Hyperband fibre as a Hyper House bill of materials.

KEY FEATURES

- 42U of 19-inch mounting
- Solid acoustic door
- Lockable doors and removable side panels
- Black powder-coated steel
- Baying supported. Order the baying kit separately.
- 800 x 1000 mm footprint
- Numbered EIA-310 rails, front and rear
- Closed roof on a noise-controlled enclosure
- Supplied flat-packed for site assembly

Characteristic	Value for this SKU
Product code	HSP-RACK-AC-42U
Cabinet	Acoustic
Rack units	42U
Footprint	800 x 1000 mm
Width	800 mm
Depth	1000 mm
Mounting	19-inch EIA-310
Rails	Front and rear, numbered in U
Front door	Solid acoustic leaf
Rear door	Lockable steel
Side panels	Removable
Roof	Closed panel
Material	Steel
Finish	Black powder coat
Supply	Flat-packed
Baying	Supported. Order the baying kit separately.
Application	Occupied-space server noise control
Warranty	Product warranty; 25-Year System Warranty applies to qualifying registered Hyperspan channels



Acoustic Cabinet 42U

HSP-RACK-AC-42U

Rack cabinet. Size, door and load as specified for this code.

NOTES


It is supplied flat-packed for assembly on site. The assembly manual for this code shows the exploded diagram and the build sequence.

19-inch EIA-310 rails accept Hyperspan patch panels, fibre panels, Power PDUs and Manage cable managers.

Baying kits, plinths, castors, fan trays and the earth bonding kit are accessories, ordered separately.

Product warranty; 25-Year System Warranty applies to qualifying registered Hyperspan channels

EXPLODED ASSEMBLY

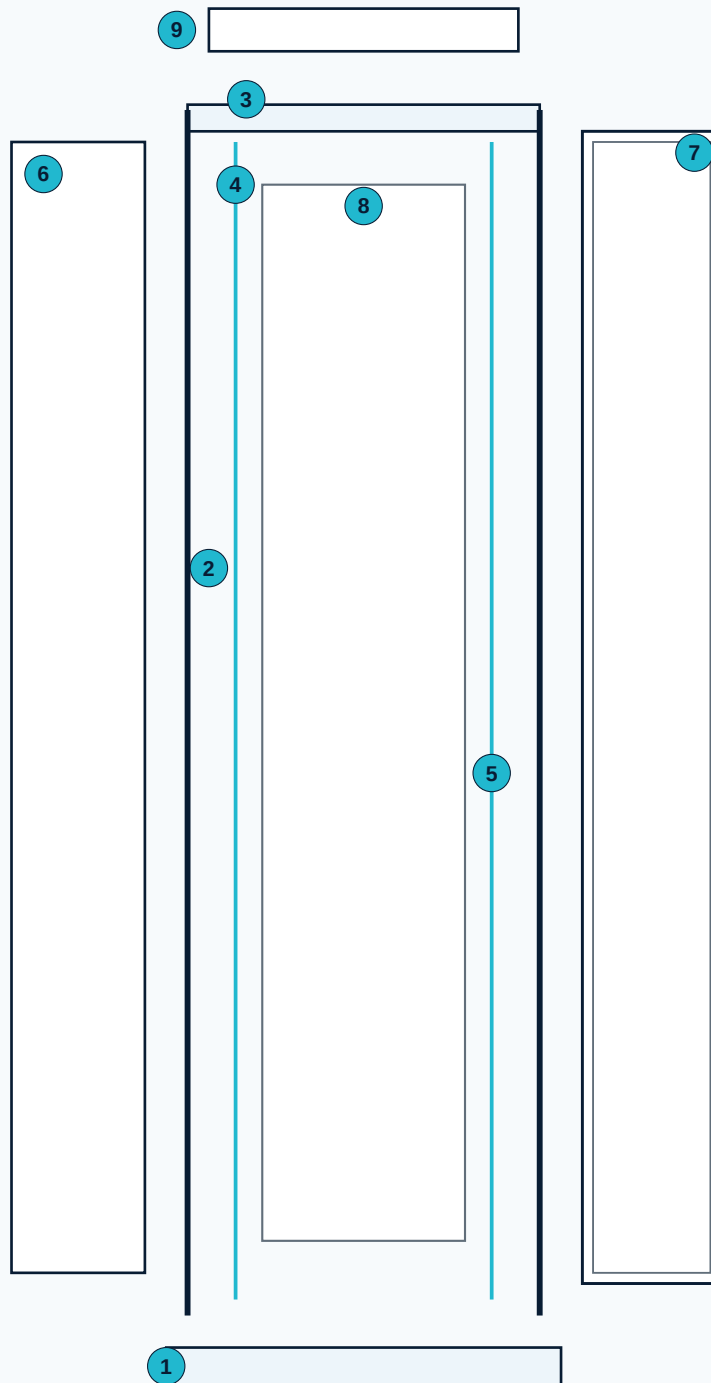

Schematic. Numbers match the parts list.