


Comms Cabinet 42U 800 x 1000 mm Glass Door

HSP-RACK-CR-42U-80100

Rack cabinet. Size, door and load as specified for this code.

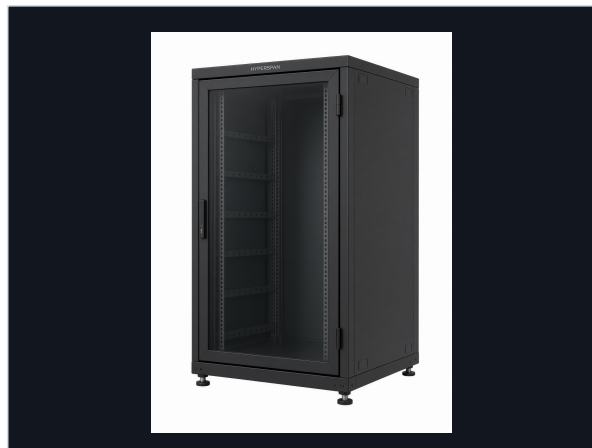

PRODUCT OVERVIEW

HSP-RACK-CR-42U-80100 is a 42U Hyperspan Rack comms cabinet. The footprint is 800 x 1000 mm. The published static load is 1000 kg. A tinted glass front door keeps the patch field visible. 19-inch EIA-310 rails, numbered in U, are fitted front and rear. The doors lock, the side panels come off, and the roof has a brush cable entry. It is supplied flat-packed for assembly on site. Baying is supported, and the baying kit is ordered as an accessory. Typical use: Switch + patch co-location. Specify it with Power PDUs, Rack panels and Hyperband fibre as a Hyper House bill of materials.

KEY FEATURES

- 42U of 19-inch mounting
- 1000 kg static load
- Numbered EIA-310 rails, front and rear
- Roof brush cable entry
- Supplied flat-packed for site assembly
- 800 x 1000 mm footprint
- Tinted glass front door
- Lockable doors and removable side panels
- Black powder-coated steel
- Baying supported. Order the baying kit separately.

Characteristic	Value for this SKU
Product code	HSP-RACK-CR-42U-80100
Cabinet	Comms
Rack units	42U
Footprint	800 x 1000 mm
Width	800 mm
Depth	1000 mm
Static load	1000 kg static
Mounting	19-inch EIA-310
Rails	Front and rear, numbered in U
Front door	Tinted glass
Rear door	Lockable steel
Side panels	Removable
Roof	Brush cable entry
Material	Steel
Finish	Black powder coat
Supply	Flat-packed
Baying	Supported. Order the baying kit separately.
Application	Switch + patch co-location
Warranty	Product warranty; 25-Year System Warranty applies to qualifying registered Hyperspan channels



Comms Cabinet 42U 800 x 1000 mm Glass Door

HSP-RACK-CR-42U-80100

Rack cabinet. Size, door and load as specified for this code.

NOTES


It is supplied flat-packed for assembly on site. The assembly manual for this code shows the exploded diagram and the build sequence.

19-inch EIA-310 rails accept Hyperspan patch panels, fibre panels, Power PDUs and Manage cable managers.

Baying kits, plinths, castors, fan trays and the earth bonding kit are accessories, ordered separately.

Product warranty; 25-Year System Warranty applies to qualifying registered Hyperspan channels

EXPLODED ASSEMBLY

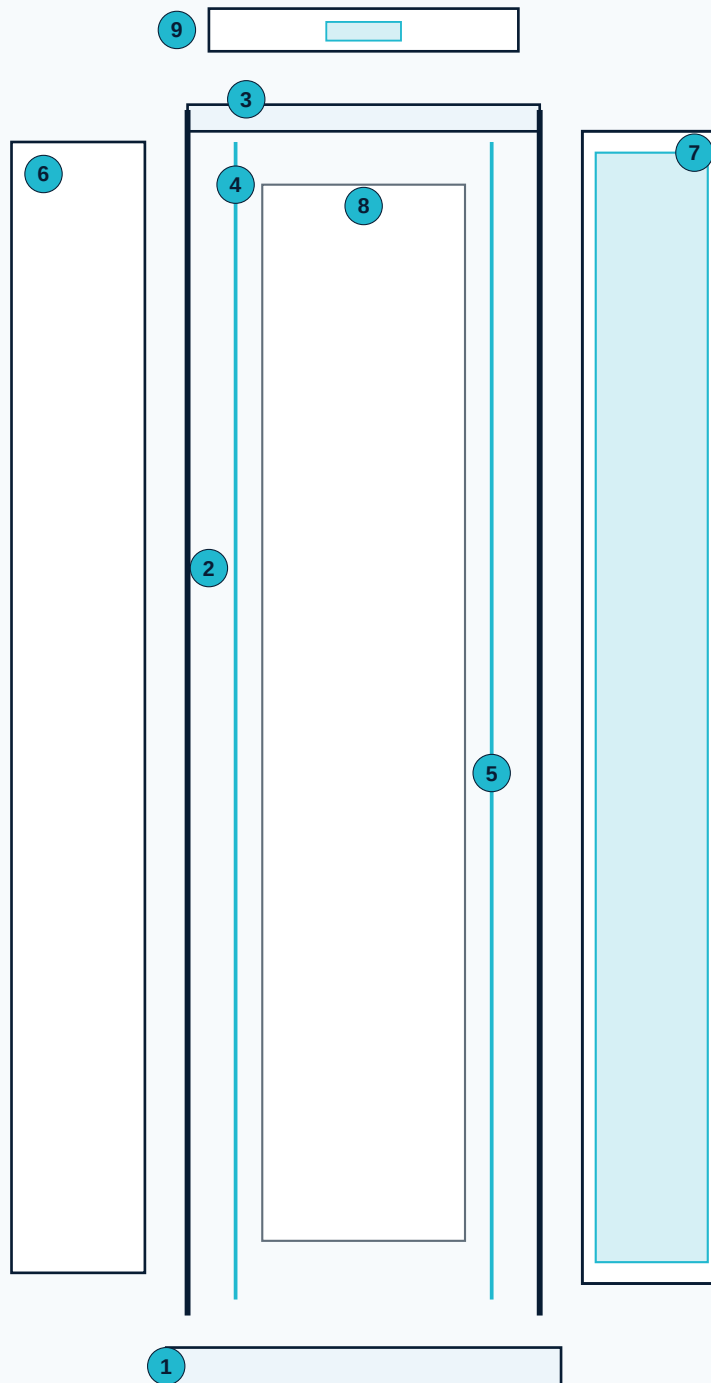

Schematic. Numbers match the parts list.